



MW571 Projector

Model Name MW571 Projector

Unique selling point

- * 3200ANSI Lumen High Brightness
- * 13000:1 High Contrast Ratio
- * Blu-ray Full HD 3D support
- * Network Standby <0.5W
- * SmartEco

Trade Mark



Projection System	DLP	
Native Resolution	WXGA (1280x800)	
Brightness	3200 ANSI Lumen	
Contrast Ratio	13000:1	
Display Color	1.07 Billion Colors	
Lens	F=2.59~2.87, f=16.88~21.88mm	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Throw Ratio	1.21~1.57	
Image Size (Diagonal)	60" ~ 180"	
Zoom Ratio	1.3x	
Lamp Type	196W	
Lamp(Normal/Eco/SmartEco/LampSave)*	4000/6000/6500/10000 hours	
Keystone Adjustment	1D, Vertical +/- 40 degrees	
Projection Offset	Vertical: 120% ±5%	
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)*RB = Reduced blanking	
Horizontal Frequency	15K-102KHz	
Vertical Scan Rate	23-120Hz	
Compatibility	HDTV Compatibility 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility NTSC, PAL, SECAM 3D Compatibility Frame Sequential: Up to 60Hz 720p (Please refer to User Manual Frame Packing: Up to 24 Hz 1080p for detailed support timing.) Side by Side: Up to 24Hz 1080p Top Bottom: Up to 60Hz 1080p	
Interface	Computer in (D-sub 15pin) x 2(shared with component video) HDMI x 1 Monitor out x 1 Composite Video in (RCA) x1 S-Video in x 1 Audio in (Mini Jack) x 1 Audio out (Mini Jack) x 1 Speaker 10W x 1 LAN(RJ-45) x1 USB (Type mini B) x1 RS232 (DB-9pin) x 1 IR Receiver x1 (Front)	
Dimensions	Dimensions(W x H x D) 283 x 95 x 222 mm (with feet) 283 x 88.7 x 222 mm (without feet) Weight: 1.9 Kg (4.19 lbs)	
Power	Power Supply AC100 to 240 V, 50 to 60 Hz Power Consumption Normal 265W, Eco 220W, Network standby <6W, Standby <0.5W Power Management Function Automatic power off after 20 minutes without a display source	
Audible Noise	33/28 dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
Picture Modes	**Dynamic / Presentation / sRGB / Cinema / (3D) / User 1 / User 2	
Accessories	Standard Remote Control w Battery Power Cord (by region) User Manual CD Quick Start Guide Optional Spare Lamp Kit Ceiling mount kit 3D Glasses Carry Bag	


*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

** Default mode is Presentation. When 3D is on, Picture Modes only shows 3D. When 3D is off, it is not shown in Picture Modes.

Distance Chart



The screen aspect ratio is 16:10 and the projected picture is in a 16:10 aspect ratio

Screen size				Distance from screen (mm)			Vertical offset (mm)
Diagonal	W (mm)	H (mm)		Min length (max. zoom)	Average	Max length (min. zoom)	
Inch	mm						
60	1524	1292	808	1564	1796	2029	80.8
70	1778	1508	942	1824	2096	2367	94.2
80	2032	1723	1077	2085	2395	2705	107.7
90	2286	1939	1212	2346	2695	3044	121.2
100	2540	2154	1346	2606	2994	3382	134.6
110	2794	2369	1481	2867	3293	3720	148.1
120	3048	2585	1615	3128	3593	4058	161.5
130	3302	2800	1750	3388	3892	4396	175.0
140	3556	3016	1885	3649	4192	4734	188.5
150	3810	3231	2019	3909	4491	5073	201.9
160	4064	3446	2154	4170	4790	5411	215.4
170	4318	3662	2289	4431	5090	5749	228.9
180	4572	3877	2423	4691	5389	6087	242.3

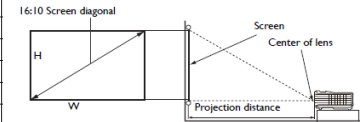


Ceiling mount Chart

Ceiling Mount screw: M4
(Max L = 25 mm; Min L = 20 mm)

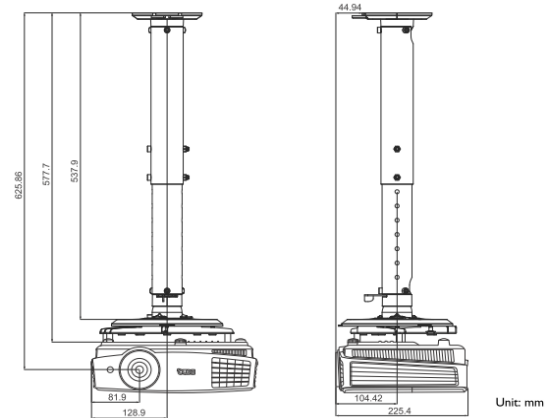

Dimension

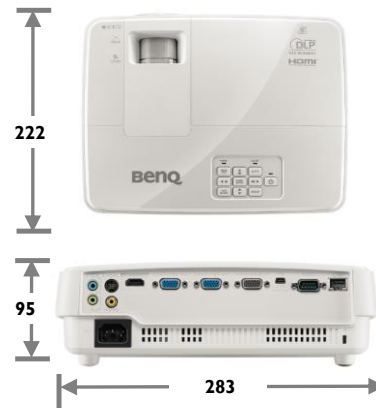

Unit: mm