



MX63 IST Digital Projector

Model Name MX63 IST Digital Projector

Unique selling point

- * Brightness up to 3,200 Lumens
- * 2 HDMI Ports with 1 MHL Port Available
- * Short Throw Projector
- * <0.5W standby mode
- * Up to 10,000 hours Long lamp life
- * SmartEco Power Saving technology

Trade Mark



Projection System	DLP
Native Resolution	XGA (1024x768)
Brightness	3200AL
Contrast Ratio	13000:1
Display Color	1.07 Billion Colors
Lens	F=2.6-2.78, f=10.2-12.24mm
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)
Throw Ratio	0.9-1.08 (78" @ 1.44m)
Image Size (Clear Focus/ Maximum)	60"-120" / 300"
Zoom Ratio	1.2:1
Lamp Type	196W
Lamp(Normal/Economic/SmartEco Mode)*	4500/6000/6500/10000 hours
Keystone Adjustment	1D, Auto Vertical +/- 30 degrees
Projection Offset	110% ±5%
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200) * RB= Reduced blanking
Horizontal Frequency	15K~102KHz
Vertical Scan Rate	23~120Hz
Compatibility	HDTV Compatibility Video Compatibility

480i, 480p, 576i, 576p, 720p, 1080i, 1080p
NTSC, PAL, SECAM

PC: 120Hz Frame Sequential 3D for resolutions up to WXGA, PC: 60Hz Top-bottom 3D for resolutions up to SXGA+
Video: 60Hz Frame Sequential 3D for resolutions up to 480i

Interface	Computer in (D-sub 15pin) Monitor out (D-sub 15pin) Composite Video in (RCA) S-Video in (Mini DIN 4pin) HDMI (1.4a) Audio in (Mini Jack) Audio L/R in (RCA) Audio out (Mini Jack) Speaker USB (Type mini B) USB (Type A) RS232 (DB-9pin) IR Receiver	x 1 (Share with component) x 1 x 1 x 1 x2 (one share with MHL2.0) x 1 x 1 x 1 10W x 1 x 1 (Download & Page up/ down) x1 (1.5A power supply) x 1 x2 (Front+Top)
-----------	--	--

Dimensions	Dimensions(W x H x D) Weight	287.3 x 114.4x 232.6 mm 2.6KG
------------	---------------------------------	----------------------------------

Power	Power Supply Power Consumption Power Management Function	AC100 to 240 V, 50 to 60 Hz Normal 305W, Eco 220W, Standby <0.5W Automatic power off after 20 minutes without a display source.
-------	--	---

Audible Noise	33/28 dBA (Normal/Economic mode)
---------------	----------------------------------


On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
-----------------------------	---

Picture Modes	**Bright / Presentation / sRGB / Cinema / (3D) / User 1 / User 2
---------------	--


Accessories	Standard Remote Control w/ Battery Power Cord (by region) User Manual CD Quick Start Guide Warranty Card (by region) VGA(D-sub 15pin) Cable	Optional Presentation Plus Spare Lamp Kit Ceiling Mount 3D Glasses Carry bag	P/N: 65J9306.002 P/N: 5JJ9V05.001 P/N: 5JJ2K01.001 P/N: 5JJ9H25.001
-------------	---	---	--

Distance Chart

Screen size				Distance from screen (mm)			
Diagonal	W	H	Min length (max. zoom)	Average	Max length (min. zoom)	Vertical offset (mm)	
Inch	mm	(mm)					
40	1016	813	610	734	807	881	30
50	1270	1016	762	917	1009	1101	38
60	1524	1219	914	1101	1211	1321	46
80	2032	1626	1219	1468	1615	1761	61
100	2540	2032	1524	1835	2018	2202	76
120	3048	2438	1829	2202	2422	2642	91
150	3810	3048	2286	2752	3028	3303	114
200	5080	4064	3048	3670	4037	4404	152
220	5588	4470	3353	4037	4440	4844	168
250	6350	5080	3810	4587	5046	5505	191
300	7620	6096	4572	5505	6055	6606	229

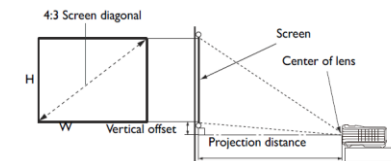

Wall mount/Ceiling mount Chart

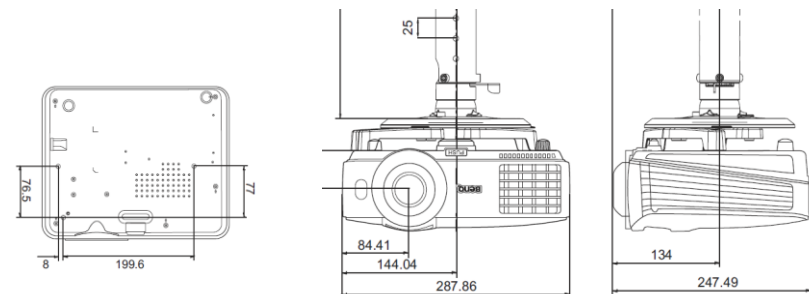

Dimension



*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

** Default mode is Presentation. When 3D is on, Picture Modes only shows 3D. When 3D is off, it is not shown in Picture Modes.