


# EB-Z11000



## DATASHEET

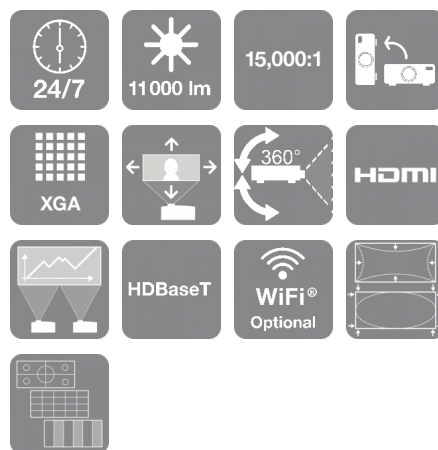

Benefiting from 3LCD technology, the 11,000-lumen, XGA resolution EB-Z11000 projector is simple to set up.

The white EB-Z11000 is an impressive and versatile installation projector, with rental applications, that displays images with 11,000 lumens brightness and in XGA resolution. Able to project portrait aspect images for digital signage, the EB-Z11000 has a flexible installation angle, lens shift for off-centre positioning and plenty of calibration options, with optional Wi-Fi and HDBaseT connectivity.

### Clear images and 3LCD technology

At 11,000 lumens the EB-Z11000 is an ultra-bright XGA resolution projector. This projector benefits from Epson's 3LCD technology, which ensures high-quality images with equally high White and Colour Light Output for vivid colours and bright images, even in daylight, and three times brighter colours than competitive projectors<sup>1</sup>.

### Perfect for large venues

Museums, auditoriums and corporate environments can benefit from the EB-Z11000's large projected image, ideal for making a big impact.

### Portrait projection

Able to project portrait aspect images, the EB-Z11000 is ideal for digital signage. Welcome to a whole new way of seeing things; portrait mode is also useful when a venue or event, such a fashion show, doesn't lend itself to landscape projection.

### Easy set-up

As well as a flexible installation angle and lens shift for off-centre positioning, the EB-Z11000 includes plenty of calibration options such as edge blending, test patterns and Epson's Super Resolution feature.

### Connectivity

The EB-Z11000 includes HDBaseT, which allows up to five connections in one. Optional Wi-Fi is also included for extra flexibility.

### Short-throw capability

Great news for auditoriums and lecture theatres; a new and exclusive LU02 short throw lens allows this projector to be positioned closer to the screen.

## KEY FEATURES

- **High-brightness**  
Ultra-bright at 11,000 lumens
- **Flexible**  
Choose different installation angles
- **3LCD technology**  
For vivid colours and bright images
- **Connectivity**  
HDBaseT and optional Wi-Fi connectivity
- **Portrait projection**  
When landscape isn't suitable



**EPSON**  
WORLD LEADER  
IN PROJECTORS

Source: Futuresource Consulting Ltd.

**EPSON**<sup>®</sup>  
EXCEED YOUR VISION

## PRODUCT SPECIFICATIONS

### TECHNOLOGY

|                   |   |
|-------------------|---|
| Projection System | 3LCD Technology, RGB liquid crystal shutter |
| LCD Panel         | 1.03 inch with C2 Fine                      |

### IMAGE

|                              |  |
|------------------------------|--|
| Colour Light Output          | 11,000 lumen-7,300 lumen (economy)                                 |
| White Light Output           | 11,000 lumen - 7,300 lumen (economy)                               |
| Portrait Colour Light Output | 8,500 lm   |
| Portrait White Light Output  | 8,500 lm   |
| Resolution                   | XGA, 1024 x 768, 4:3   |
| Contrast Ratio               | 15,000 : 1   |
| Lamp                         | 380 W, 2,000 h durability, 4,000 h durability (economy mode)       |
| Lamp (portrait mode)         | 304 W, 1,000 Hours Durability                                      |
| Keystone Correction          | Manual vertical: $\pm 30^\circ$ , Manual horizontal $\pm 30^\circ$ |
| Aspect Ratio                 | 4:3  |

### OPTICAL

|                          |   |
|--------------------------|---|
| Projection Ratio         | 1.65 - 2.65:1   |
| Zoom                     | Motorized, Factor: 1 - 1.61                             |
| Lens Shift               | Motorized - Vertical $\pm 56\%$ , horizontal $\pm 19\%$ |
| Projection Size          | 60 inches - 500 inches                                  |
| Projection Lens F Number | 1.65 - 2.51   |
| Focal Distance           | 36 mm - 57.5 mm   |
| Focus                    | Motorized   |
| Projection Distance Wide | 1.9 m - 16.8 m  |
| Projection Distance Tele | 3.2 m - 27.2 m  |
| Lens                     | Optical   |

### CONNECTIVITY

|            |  |
|------------|--|
| Interfaces | USB 1.1 Type A, USB 2.0 Type B (Service Only), RS-232C, WLAN, Wireless LAN IEEE 802.11b/g/n (optional), VGA in, VGA out, DVI in, HDMI in, Composite in, Component in, BNC in (6x), S-Video in, HDBaseT |
|------------|--|

### GENERAL

|                    |   |
|--------------------|---|
| Energy Use         | 1,060 W, 788 W (economy), 0.37 W (standby)                            |
| Supply Voltage     | AC 100 V - 240 V, 50 Hz - 60 Hz                                       |
| Product dimensions | 741 x 534 x 197 mm (Width x Depth x Height)                           |
| Product weight     | 26 kg   |
| Noise Level        | Normal: 40 dB (A) - Economy: 35 dB (A)                                |
| Temperature        | Storage -10° C - 60° C  |
| Humidity           | Operation 20% - 80%, Storage 10% - 90%                                |
| Included Software  | EasyMP Monitor, EasyMP Multi PC Projection, EasyMP Network Projection |
| Options            | Document camera, Quick wireless USB key, Wireless LAN unit            |

### ADVANCED FEATURES

|                    |  |
|--------------------|--|
| Security           | Kensington lock, Security cable hole                   |
| Video Colour Modes | Dynamic, Photo, Presentation, sRGB, Theatre, DICOM SIM |

### OTHER

|          |   |
|----------|---|
| Warranty | 36 months Carry in or 20,000 h, Lamp: 12 months or 1,000 h<br>Optional warranty extension available |
|----------|---|

## EB-Z11000

### WHAT'S IN THE BOX

- Computer cable
- HDMI Cable Clamp
- Power cable
- Remote control incl. batteries
- User's Manual Set

## OPTIONAL ACCESSORIES

EB-Z11000

- Lamp (x2) - ELPLP82  
V13H010L82
- Lamp - ELPLP81  
V13H010L81
- 3D Polarizer - ELPLP01  
V12H618A01
- Wireless LAN Adapter (b/g/n) - ELPAP07  
V12H418P13
- Ceiling Mount (Low) - ELPMB25  
V12H003B25
- Ceiling Mount (High) - ELPMB26  
V12H003B26
- HDBaseT Transmitter - ELPHD01  
V12H547041
- 3D Glasses (Passive for Child, x5) - ELPGS02B  
V12H541B10
- Quick Wireless Connect USB key - ELPAP09  
V12H005M09

## OPTIONAL LENSES

- Lens (ST Off Axis) - ELPLU02  
V12H004U02
- Lens (Long Throw) - ELPLL07  
V12H004L07
- Lens (Middle Throw 1) - ELPLM06  
V12H004M06
- Lens (Middle Throw 2) - ELPLM07  
V12H004M07
- Lens (Rear Wide) - ELPLR04  
V12H004R04
- Lens (Wide) - ELPLW04  
V12H004W04

## LOGISTICS INFORMATION

|                         |               |
|-------------------------|---------------|
| SKU                     | V11H606040    |
| EAN code                | 8715946541228 |
| Multiple Order Quantity | 1 Units       |
| Country of Origin       | China         |
| Pallet Size Euro        | 4 Units       |
| Pallet Size Block       | 4 Units       |



For more information please contact:

Telephone: 01952 607111 (UK)+  
01 436 7742 (Republic of Ireland)  
E-mail: [enquiries@epson.co.uk](mailto:enquiries@epson.co.uk)  
Chat: [etalk.epson-europe.com](https://www.epson.co.uk/etalk)  
Fax: 0871 222 6740  
+ Local call rate.

Web: [www.epson.co.uk](http://www.epson.co.uk)  
[www.epson.ie](http://www.epson.ie)

1. Compared to leading 1-chip DLP business and education projectors based on NPD data, July 2011 through June 2012. Colour brightness (Colour Light Output) measured in accordance with IDMS 15.4. Colour brightness will vary depending on usage conditions. For more information please visit [www.epson.eu/CLO](http://www.epson.eu/CLO)

Trademarks and registered trademarks are the property of Seiko Epson Corporation or their respective owners. Product information is subject to change without prior notice.

**EPSON**<sup>®</sup>