

## CP-EU5001WN

## Our New Multi-purpose 3LCD Projector









## Introducing our innovative multi-purpose 3LCD CP-EU5001WN projector which combines all our technical expertise with our market leading knowledge.

This new, multi-purpose projector can produce 5,000 ANSI Lumens brightness and has a 16,000:1 contrast ratio with a resolution of 1920x1200.

So whether you are on the move or in an office, our CP-EU5001WN multi-purpose projector is the perfect solution for today's professionals. It combines portability and usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

## **Key Features:**

WUXGA 1920 x 1200 resolution

5,000 ANSI lumens white/colour output

16,000:1 Contrast Ratio


Images up to 300 "diagonal

Easy to use and simple to set-up

Please note: Content, technical specifications and images are subject to change.

CP-EU5001WN 3LCD Multi-purpose Projector Technical Specifications				
Display System	3LCD 16mm (0.64")	Digital Input	HDMI x 2	
Aspect Ratio	16:10	Analogue Input	15-pin Mi	
Panel Structure	3LCD	Video Output	15 pin Mir	
Resolution	WUXGA (1920 x 1200)	Audio Input	3.5mm St	
Light Output (Brightness) ANSI Lumens (Normal)	5000 (Normal) / 3750 (Eco) Audio Outp		3.5mm St	
Contrast Ratio	000:1 RS-232C Control		1 x 9-pin [	
Lamp Life (hours)	4500 (Normal) / 6000 (Eco)	Wireless LAN USB-WL-		
Lens	Built-in	1		
Lens Zoom	Manual zoom x 1.6	Wired LAN	RJ45 conr	
Lens Focus	Manual focus USB Type		USB Type	
Projection Lens F Number	1.65 - 2.15		USB Type	
Focus Distance	0.8 – 8.4 m (Wide), 1.3 – 13.6 m (Tele)	Power Supply	AC 100V -	
Distance to Width Ratio/ Throw Ratio (:1)	1.3 (Wide) / 2.1 (Tele)	Operating Power Consumption	400W	
Diagonal Display Size	30 - 300"	Standby Power Consumption	Less than	
Installation	Ceiling, Tabletop, Rear	Weight	5.3kg	
Speakers	16W MONO	Dimensions (W x H x D)	413 x 123	
Digital Keystone Correction (Degrees)	Horizontal ± 30°, Vertical ± 30°	Noise (Normal)	35dB (Noi	
Picture Modes	Standard, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard Davtime. Photo. Dicom SIM		10,000	
Picture Adjustments	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Zoom), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 5114z, 59 to 6114z), HDCR,		CE Markir (Class A), (Low Volta	
	Image blank by RS232C/Remote control, Image Optimizer, Magnify, Mirror reverse image, Up-side down image	Computer	IBM Comp HD, UXGA	
Operating Features	Keystone V/H, PerfectFit, Standby Audio, Audio pass through, Cloning function, Easy schedule setting		525i (480i 1125i (10a 1125p (10	
Network Features	Wireless Capability(Option), Multi Projector, Moderator Control Mode, Projector Quick Connection (ios / Android app), Projector Monitornring and Control from a Remote Location, E-mail Alerts  Supplied Accessories		Power Cal Control Ui Converter	
Security Features	Password/Myscreen Password, Pin Lock, Key Lock		CD User N	
Supported Languages	34 Languages (English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish,	Optional Accessories	USB-WL-	
		Remote Control	HL03037	
	Turkey, Arabian, Persian, Czech, Danish, Hungarian, Romanian,	Replacement Lamp, Filter	DT02061	
	Slovenian, Croatian, Greek,Lithuanian, Estonian, Latvian, Thai, Portuguese(Brazil), Indonesian, Vietnamese, Hebrew)	Projector/ Lamp Warranty	3 years / 6 please cor	

pecifications		
Digital Input	HDMI x 2 (HDCP compliant, HDMI 2 shared with MHL)	
Analogue Input	15-pin Mini-D-Sub x 2, RCA Jack x 1	
Video Output	15 pin Mini D-Sub x 1 (shared with analog computer input)	
Audio Input	3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1	
Audio Output	3.5mm Stereo Mini Jack x 1	
RS-232C Control	1 x 9-pin D-Sub	
Wireless LAN	USB-WL-5G wireless adaptor (optional)	
Wired LAN	RJ45 connector x 1	
USB Type-A	USB Type A x 2 (PC less Presentation or Wireless adapter)	
USB Type B	USB Type B x 1 (USB mouse control)	
Power Supply	AC 100V - 120V / AC 220V - 240V (50/60Hz)	
Operating Power Consumption	400W	
Standby Power Consumption	Less than 0.5W	
Weight	5.3kg	
Dimensions (W x H x D)	413 x 123 x 315mm	
Noise (Normal)	35dB (Normal) / 27dB (Whisper)	
Filter Life (Hours)	10,000	
Certification	CE Marking, EN61000-3-2, EN61000-3-3, EN55032 (Class A), EN55035 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS compliant	
Computer	IBM Compatible VGA, SVGA, XGA, WXGA, SXGA, WSXGA+, HD, UXGA, WUXGA	
Video	525i (480i), 525p (480p), 625i (576i), 625p (576p), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)	
Supplied Accessories	Power Cable (1.8m) x1, Computer Cable (2m), Remote Control Unit x1, AA Batteries x2, Lens Cap x1, Adaptor Converter x1, USB Wireless Adaptor x1, Security Label x1, CD User Manual x1, Application CD	
Optional Accessories	USB-WL-5G (wireless adapter)	
Remote Control	HL03037	
Replacement Lamp, Filter	DT02061 (without Filter) / UX41161	
Projector/ Lamp Warranty	3 years / 6 months (for education and extended warranties please contact your local dealer)	

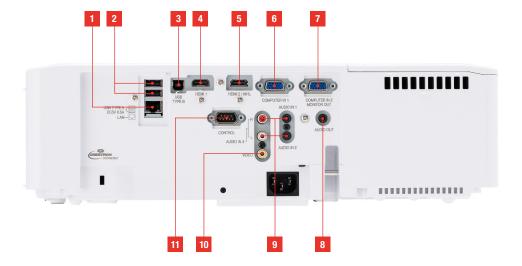

- **1.** LAN
- USB-A
   USB-B
- **4.** HDMI 1
- **5.** HDMI 2 (Supports MHL)
- **6.** Computer in 1
- 7. Computer in 2 / Monitor Out
- 8. Audio Out
- 9. Audio in
- 10. Video in
- 11. Control

Dealer Stamp

