

LP-TW4001 / LP-TW3001

Our first ever interactive 3LCD
Laser Ultra Short Throw Projectors



PJLink™

CRESTRON

Extron
CERTIFIED

Laser

HDMI™
HIGH DEFINITION MULTIMEDIA INTERFACE

AMX

3LCD

Introducing our highly innovative new 3LCD LP-TW4001 and LP-TW3001 interactive laser projectors which combines all our technical expertise with our market leading knowledge.

This new 3LCD projector is environmentally friendly as it contains no mercury lamp, provides a significant reduction in maintenance costs, as this new laser diode light source offers approx. 20,000 hours of operation time.

This new ultra-short throw projector can reach up to 4,200 ANSI lumens by using our highly efficient optical engine, providing clarity on images even within very bright / light environments and all wrapped up in a stylish package.

Key Features:

Up to 20,000 hours maintenance free operation for laser light source (50,000 hours light source using life Long life 2 mode)

WXGA 1280 x 800 resolution

Up to 4,200 ANSI lumens white/colour output

500,000:1 Contrast Ratio

HDMI 2 inputs

Image size up to 130" with category leading offset

Powered Focus

Starboard Interactive Software included with LP-TW4001/LP-TW3001 interactive models

LP-TW4001 / LP-TW3001 Interactive 3LCD Laser Ultra Short Throw Projectors


Technical Specifications

Panel Size	3 LCD 15mm (0.59")
Panel Structure	3LCD
Resolution	WXGA (1280 x 800)
Light Output (Brightness) ANSI Lumens	LP-TW4001: 4200 (Normal) / LP-TW3001: 3300 (Normal)
Contrast Ratio	500,000:1
System (Hours)	20,000
Lens	Built-in
Lens Zoom	Digital zoom x 1.35
Lens Focus	Powered focus
Projection Lens F Number	1.6
Throw Distance	0.413m - 0.903m (centre of glass to screen)
Distance to Width Ratio/ Throw Ratio (:1)	0.3
Diagonal Display Size	60 - 130"
Installation	Ceiling, Tabletop, Rear
Speakers	16W mono
Digital Keystone Correction (Degrees)	Horizontal: ± 5° / Vertical: ± 5°
Picture Modes	Standard, Natural, Cinema, Dynamic, Whiteboard, DICOM SIM, User-1, User-2, User-3
Picture Adjustments	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Zoom/Native), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51 Hz, 59 to 61 Hz), HDCR, Image blank by RS232C/Remote control, Image Optimizer, Magnify, Mirror Reverse Image, Up-side Down Image
Operating Features	Keystone V/H, PerfectFit, Standby Audio, Audio pass through, Cloning function, Easy schedule setting
Network Features	Wireless Capability(Optional), Multi Projector, Auto Power On, Moderator Control Mode, Projector Quick Connection (iOS / Android app), Projector Monitoring and Control from a Remote Location, E-mail Alerts
Security Features	Password/Myscreen Password, Pin Lock, Key Lock
Supported Languages	34 Languages (English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese(Brazil), Indonesian, Vietnamese, Hebrew)
Digital Input	HDMI x 2 (HDCP compliant, HDMI 2 shared with MHL)
Analogue Input	15-pin Mini-D-Sub x 2, RCA Jack x 1
Video Output	15 pin Mini D-Sub x 1 (shared with analog computer input)
Audio Input	3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1
Audio Output	3.5mm Stereo Mini Jack x 1
RS-232C Control	1 x 9-pin D-Sub
Wireless LAN	USB-WL-5G (IEEE802.11 a/b/g/n/ac: 2.4GHz/5GHz) (optional)
Wired LAN	RJ45 connector x 1
USB Type-A	USB Type A x 2 (PC less Presentation or Wireless adapter)
USB Type B	USB Type B x 1 (USB display or USB mouse control)
Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)
Operating Power Consumption	LP-TW4001: 350W / LP-TW3001: 280W
Standby Power Consumption	Less than 0.5W
Weight	LP-TW4001: 7.6Kg / LP-TW3001: 7.4Kg
Dimensions (W x H x D)	512 x 155 x 424mm
Noise (Normal)	34dB (Normal), 28dB (Eco)
Filter Life (Hours)	20,000

Certification	CE Marking, EN61000-3-2, EN61000-3-3, EN55032 (class A), EN55024(EMC directive), EN60950-1 (Low voltage directive), WEEE/RoHS compliant
Computer	IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+/SXGA/SXGA+/UXGA (compressed)
Video	525i (480i), 525p (480p), 625i (576i), 625p (576p) 1125i (1080i@50/60), 1125p (1080p@50/60)
Supplied Accessories	Power Cable (1.8m) x1, Computer Cable (2m) x1, Remote Control Unit x1, Concise User Manual x1, Security Label x1, Adapter Cover x1, Hook Metal x1, Screw x1, HDMI Cable Holder (x2), Cable Tie (large x1, medium x2, small x1), AA Batteries x2, Interactive Pen x2, Pen Tip x4, AAA Batteries x4, Starboard Interactive DVD
Optional Accessories	USB wireless adaptor USB-WL-5G, Wall mount unit: HAS-WM06 (in certain cases wall mount is included), Finger Touch Unit (FT-01B), Interactive Pen (I-PEN4)
Filter	UX43251
Remote Control	HL03037
Projector/ Light source Warranty	20,000 hours / 5 years (whichever comes first) (for extended warranties please contact your local dealer)



Finger Touch Unit (FT-01B)

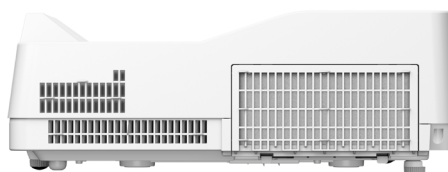

Interactive Pen (I-PEN4)

Dealer Stamp

HITACHI
Inspire the Next

Hitachi Digital Media

Hitachi Europe Ltd, Whitebrook Park, Lower Cookham Road,
Maidenhead, Berkshire SL6 8YA, United Kingdom
Tel: +44 (0)1628 585 000 / Fax: +44 (0)1628 585 163
www.hitachidigitalmedia.com